



Двухигольная специальная
швейная машина для разно-
образных двухигольных работ

- Высокое качество видимого стежка при отделочных работах, а также скрытого при работе с соединительными и монтажными швами
- Эргономичная конструкция исполнительных механизмов гарантирует быструю и точную юстировку первого и второго перетопла лапки (с автоматической подгонкой скорости)
- Программируемая мультикнопка в зоне досягаемости швеи
- Увеличенный проход под рукавом машины (345,0 x 120,0 мм)
- Устройство намотки нитки на шпулю оснащенное ножом ("Spul-Assistant")
- Устройство распознавания остатка нижней нити (опция)
- Опция: механизм обрезки края с минимальной шириной обрезки 1, 5 мм с приводом от отдельного двигателя
- Повышенная производительность за счет дополнительных функций, таких как быстрое переключение между двумя предварительно выбранными длинами стежков, дополнительное натяжение нити и быстрое переключение высоты перетопла.
- Опция: ассиметричные швейные органы

Типовая область применения

- Универсальные двухигольные швейные работы для среднетяжелого применения

Технические данные

- Макс.количество стежков: 3.800/мин.
- Макс.длина стежка: 12,0 мм
- Максимальный подъем верхнего транспортера: 9,0 мм

Dvojčehlová speciální rychloběžka
nejvyšší technologické úrovně pro
všeobecné uplatnění

- Mimořádně vysoká kvalita stehu při štepování na viditelných místech a při upevňovacích a montážních švech
- Ergonomicky uspořádané nastavovací prvky zaručují rychlé a precizní nastavení jednoho a druhého zdvihu horního podávání (s automatickým přizpůsobením rychlosti)
- Programovatelná sada tlačítek v blízkém dosahu obsluhy
- Velký průchodný prostor pod ramenem stroje (345,0 x 120,0 mm)
- Cívkovač s odfezovým nožikem („Spul-Assistent“)
- Rozpoznání zbytku spodní nitě (Option)
- Option: motorem poháněný ořez krajů s nejmenším odstupem ořezu 1,5 mm
- Řízení výkonu v závislosti na přídatných funkcích, jako je druhá délka stehu, přídatné napětí nití a nastavení zdvihu horního podávání
- Option: Asymetrická sada dílů

Typická oblast použití

- Univerzální dvoujehlové aplikace v středně těžké oblasti použití

Technická data

- Max. rychlost šití: 3.800/min.
- Max. délka stehu: 12,0 mm
- Max. zdvih horního podáváníí: 9,0 mm

Високо технологична
двуиглова скоростна машина


- Изключително високо качество на шева при лицеви, съединителни и монтажни шевове
- Приспособление за прецизна настройка на първия и втория ход на горния транспорт. (с автоматично напасване на скоростта)
- Програмираем мултифункционален бутон
- Голям просвет под глават (345,0 x 120,0 mm)
- Навивачка с ножче за отрязване на края
- Следене на долния конец (Опция)
- Опция: Отделно задвижено приспособление за образване на канта с резерва 1,5 mm
- Високо производителна машина въз основа на допълнителните функции, като втора дължина на бода, допълнителен опън на края и бързо превключване на хода на транспорта.
- Опция: Асиметричен комплект резервни части.

Приложение

- Универсални шевни операции на средно тежки материали.

Технически данни

- Макс брой бодове: 3.800/min.
- Макс. дължина на бода: 12,0 mm
- Макс. ход на горния транспорт: 9,0 mm





2545/46 Plus

Длиннорукавная версия / Dlouhé rameno / Дълго рамо



Специальная швейная машина с нижним, шагающим верхним и игльным транспортом и вертикальным челноком

- Высокое качество видимого стежка при отделочных работах, а также скрытого при работе с соединительными и монтажными швами
- Эргономичная конструкция исполнительных механизмов гарантирует быструю и точную юстировку первого и второго перетопа лапки (с автоматической подгонкой скорости)
- Программируемая мультикнопка в зоне досягаемости швеи
- Увеличенный проход под рукавом машины (345,0 x 120,0 мм)
- Вылет рукава: 700 мм и 1.000 мм
- Встроенный светодиодный светильник для освещения рабочего места
- Устройство намотки нитки на шпулю оснащенное ножом ("Spul-Assistent")
- Устройство распознавания остатка нижней нитки (опция)
- Опция: механизм обрезки края с минимальной шириной обрезки 1,5 мм с приводом от отдельного двигателя
- Опция: ассиметричные швейные органы

Типовая область применения

- Монтажные и декоративные швы на крупногабаритных деталях

Технические данные

- Макс. количество стежков: 3.800/мин.
- Макс. длина стежка: 12,0 мм
- Максимальный подъем верхнего транспортера: 9,0 мм

Speciální rychloběžka se spodním, alternujícím horním a jehelním podáváním a vertikálním chapačem

- Mimořádně vysoká kvalita stehu při štepování na viditelných místech a při upevňovacích a montážních švech
- Ergonomicky uspořádané nastavovací prvky zaručují rychlé a precizní nastavení jednoho a druhého zdvihu horního podávání (s automatickým přizpůsobením rychlosti)
- Programovatelná sada tlačítek v blízkém dosahu obsluhy
- Velký průchodný prostor pod ramenem stroje (345,0 x 120,0 mm)
- Délka ramena: 700 mm a 1.000 mm
- Integrované LED-osvětlení k nasvětlení místa šití beze stínů
- Cívkočav s odřezovým nožičkem („Spul-Assistent“)
- Rozpoznání zbytku spodní nitě (Option)
- Option: motorem poháněný odřez krajů s nejmenším odstupem ořezu 1,5 mm
- Option: Asymetrická sada dílů

Typická oblast použití

- Monážní a ozdobné švy na velkoplošných dílech

Technická data

- Max. rychlost šití: 3.800/min.
- Max. délka stehu: 12,0 mm
- Max. zdvih horního podávání: 9,0 mm

Високо скоростна права машина с дълго рамо с долен-алтерниращ горен и иглен транспорт и вертикален грайфер


- Изключително високо качество и сигурност на бода при лицеви, свързващи и монтажни шевове.
- Специално приспособление за прецизна настройка на първия и втория ход на горния транспорт (с автоматично напасване на скоростта)
- Мултифункционален бутон лесен за обслужване
- Голям просвет под главата (345,0 x 120,0 mm)
- Дължина на рамото: 700 mm и 1.000 mm
- Вградено LED-осветление за безпроблемно шиене
- Навивачка с ножче за отрязване на края
- Следене на остатък на долния конец (опция)
- Опция: Задвижено с мотор приспособление за отрязване на канта с резерва до 1,5 mm
- Опция: Асиметричен комплект резервни части.

Приложение

- Монтажни и фини шевове на големи шевни детайли

Технически данни

- Макс. брой бодове: 3.800/мин.
- Макс. дължина на бода: 12,0 mm
- Макс. ход на горния транспорт: 9,0 mm



PFAFF® Industrial

POWERLine
2545/46





POWERline 2545/46

Revolutionary...

The logo for the Interzum award, featuring the word "interzum" in a bold, sans-serif font above the word "award" in a smaller, similar font. The text is white on a red background.

interzum award:
intelligent
material & design
2007

Category "BEST OF THE BEST"
for the new PFAFF upholstery machine

The combination of revolutionary design and innovative engineering has led to the development of something quite special, extraordinary – something, which will influence the future of the sewing machine. An impressive example for such a far-reaching combination is the POWERLINE 2545/2546 – a line of machines, which represents a new generation of special high-speed sewing machines with triple feed (bottom, needle and alternating top feed) and vertical hook.

2545: single-needle version

2546: double-needle version

Clear and precise functions with ergonomically arranged control elements are the outstanding features of this series, for which PFAFF won the Interzum Innovations-Award 2007 in the "Best of the Best " category. The machine achieves an equally high stitch quality on top-stitching work in the visible areas and on assembly seams in the non-visible areas – flexibility which knows no boundaries in the automotive and home upholstery sectors. Top sewing results are guaranteed both on fine leather and on heavy upholstery materials. With the largest arm clearance in its class, the machine guarantees excellent handling. Technical features, like the programmable multi-switch or the new "winding assistant" support the working flexibility and make the POWERLINE a multi-feature machine with "excellent benefits".

The fine tension of the surface signalizes power and dynamics. The attractive design, the trend-setting ergonomics and the unique service concept of the Powerline 2545/2546 mark a revolutionary milestone in the 150 year old history of the sewing machine.

PFAFF
2545

Overview of the 2545/2546

The POWERLINE 2545/2546 is available in the following versions with varying equipment:

	BASIC	CLASSIC	PLUS
Vertical hook, large (for threads up to size 10/3 syn.)	●		●
Vertical hook, XXL extra large (for threads up to size 10/3 syn.)	○		○
Thread trimmer, < 13 mm thread ends (-900/81)		●	●
Thread trimmer, < 5 mm thread ends (-900/82)		○	○
Thread nipper, controlled (-909/12)		○	○
Presser foot lift, manual by knee lever	●		
Presser foot lift, electro-pneumatic (-910/04)		●	●
Manual backtacking with hand lever	●	●	●
Automatic backtacking, electro-pneumatic (-911/35)		●	●
1 pre-selectable stitch length	●	●	
2 pre-selectable stitch lengths, alternately switchable			●
2 pre-selectable thread tensions (per needle), one can be switched on manually	●		
2 pre-selectable thread tensions (per needle), one can be switched on electro-pneumatically by knuckle switch		●	●
Top feed stroke is manually adjustable up to 9 mm	●	●	
2 top feed strokes are manually adjustable, alternately switchable			●
Unison feed with height adjustment of the bottom feeder	●	●	●
Unison feed with engageable lifting motion of the bottom feeder	○	○	○
Oil-level indicator	●	●	●
Oil-level indicator on the display, with warning light on sewing head		●	●
Sewing feet pressure, manually adjustable	●	●	●
Clutch motor	●		
DC motor	○		
DC motor P74 ED-L * / DC motor PF321 A DC 1550		●	●
Control panel BDF-PicoTop / BDF V 820		●	●
Bobbin thread monitor with stitch counter and LED display		●	●
Integrated panel with multi-function buttons & programmable multi-switch		●	●
Built in LED sewing light in the machine head, dimmable	○	●	●
Bobbin thread winder	●	●	●
Attachment slide, holder	●	●	●
Skip stitch detection (SSD) to control the quality of the seam ¹⁾		○	○
Bobbin thread monitoring with thread detection		○	○
Monitoring of slide plate / Safety device for the start ²⁾		○	○
Overload safety clutch	●	●	●
Control element safety device		○	○

* Necessary for thread trimmer, backtacking, thread nipper, presser foot lift, 2 switchable stitch lengths, 2 switchable top feed strokes

● standard
○ option

^{1) 2)} Only in combination with the bobbin thread monitor by the sensor

Versions of the 2545*

2545-021/100 BASIC

Special single-needle high-speed seamer with unison feed (lockstitch)

- Large vertical hook for threads up to 10/3**
- Top feed stroke up to 9 mm, presser foot lift up to 20 mm, stitch length up to 12.0 mm
- Max. sewing speed 3,800 stitches/min.
- Overload safety clutch

2545-041/100 BASIC

Special single-needle high-speed seamer with unison feed (lockstitch)

- Extra large vertical hook with 70% more thread capacity, for threads up to 10/3**
- Top feed stroke up to 9 mm, presser foot lift up to 20 mm, stitch length up to 12.0 mm
- Max. sewing speed 3,400 stitches/min.
- Overload safety clutch

2545-321/041 CLASSIC

Special single-needle high-speed seamer with unison feed (lockstitch)

- Large vertical hook for threads up to 10/3**
- Thread trimmer, automatic presser foot lift, automatic backtacking device electro-pneumatically controlled
- Second thread tension electro-pneumatically controlled
- Adjustable top feed stroke up to 9 mm without quick change stepping control with automatic speed setting
- Presser foot lift up to 20 mm, 1 stitch length up to 12.0 mm
- Max. sewing speed 3,800 stitches/min.
- Built in LED sewing light in the machine head
- Drive at buyer's choice:
DC motor PFAFF P74 ED-L or DC motor EFKA PF321 A DC 1550
- Overload safety clutch

2545-341/041 CLASSIC

Special single-needle high-speed seamer with unison feed (lockstitch)

- Extra large vertical hook with 70% more thread capacity, for threads up to 10/3**
- Thread trimmer, automatic presser foot lift, automatic backtacking device electro-pneumatically controlled
- Second thread tension electro-pneumatically controlled
- Adjustable top feed stroke up to 9 mm without quick change stepping control with automatic speed setting
- Presser foot lift up to 20 mm, 1 stitch length up to 12.0 mm
- Max. sewing speed 3,400 stitches/min.
- Built in LED sewing light in the machine head
- Drive at buyer's choice:
DC motor PFAFF P74 ED-L or DC motor EFKA PF321 A DC 1550
- Overload safety clutch

2545-321/042 CLASSIC

Special single-needle high-speed seamer with unison feed (lockstitch)

- Large vertical hook for threads up to 15/3**
- Thread trimmer for short thread ends (Remaining thread length = < 5 mm), automatic presser foot lift, automatic backtacking device electro-pneumatically controlled
- Thread nipper electro-pneumatically controlled
- Second thread tension electro-pneumatically controlled
- Adjustable top feed stroke up to 9 mm without quick change stepping control with automatic speed setting
- Presser foot lift up to 20 mm, 1 stitch length up to 9.0 mm
- Max. sewing speed 3,800 stitches/min.
- Built in LED sewing light in the machine head
- DC motor PFAFF P74 ED-L
- Overload safety clutch

* further on request

** depending on parts set

Versions of the 2545*

2545-341/042 CLASSIC

Special single-needle high-speed seamer with unison feed (lockstitch)

- Extra large vertical hook with 70% more thread capacity, for threads up to 15/3**
- Thread trimmer for short thread ends (Remaining thread length = < 5 mm), automatic presser foot lift, automatic backtacking device electro-pneumatically controlled
- Thread nipper electro-pneumatically controlled
- Second thread tension electro-pneumatically controlled
- Adjustable top feed stroke up to 9 mm without quick change stepping control with automatic speed setting
- Presser foot lift up to 20 mm, 1 stitch length up to 9.0 mm
- Max. sewing speed 3,400 stitches/min.
- Built in LED sewing light in the machine head
- DC motor PFAFF P74 ED-L
- Overload safety clutch

2545-521/001 PLUS

Special single-needle high-speed seamer with unison feed (lockstitch)

- Large vertical hook for threads up to 10/3**
- Thread trimmer, automatic presser foot lift, automatic backtacking device electro-pneumatically controlled
- Quick-change stepping control of top feed, second thread tension, quick adjustment of second stitch length (electro-pneumatically controlled)
- Adjustable top feed stroke up to 9 mm with automatic speed setting, presser foot lift up to 20 mm, stitch length up to 12.0 mm
- Max. sewing speed 3,800 stitches/min.
- Built in LED sewing light in the machine head
- Drive at buyer's choice:
DC motor PFAFF P74 ED-L or DC motor EFKA PF321 A DC 1550
- Overload safety clutch

2545-521/002 PLUS


Special single-needle high-speed seamer with unison feed (lockstitch)

- Large vertical hook for threads up to 15/3**
- Thread trimmer for short thread ends (Remaining thread length = < 5 mm), automatic presser foot lift, automatic backtacking device electro-pneumatically controlled
- Quick-change stepping control of top feed, second thread tension, quick adjustment of second stitch length (electro-pneumatically controlled)
- Thread nipper electro-pneumatically controlled
- Adjustable top feed stroke up to 9 mm with automatic speed setting, presser foot lift up to 20 mm, stitch length up to 9.0 mm
- Max. sewing speed 3,800 stitches/min.
- Built in LED sewing light in the machine head
- Drive at buyer's choice:
DC motor PFAFF P74 ED-L or DC motor EFKA PF321 A DC 1550
- Overload safety clutch

2545-541/001 PLUS

Special single-needle high-speed seamer with unison feed (lockstitch)

- Extra large vertical hook with 70% more thread capacity, for threads up to 10/3**
- Thread trimmer, automatic presser foot lift, automatic backtacking device electro-pneumatically controlled
- Quick-change stepping control of top feed, second thread tension, quick adjustment of second stitch length (electro-pneumatically controlled)
- Top feed stroke up to 9 mm, presser foot lift up to 20 mm, stitch length up to 12.0 mm
- Max. sewing speed 3,400 stitches/min.
- Built in LED sewing light in the machine head
- Drive at buyer's choice:
DC motor PFAFF P74 ED-L or DC motor EFKA PF321 A DC 1550
- Overload safety clutch

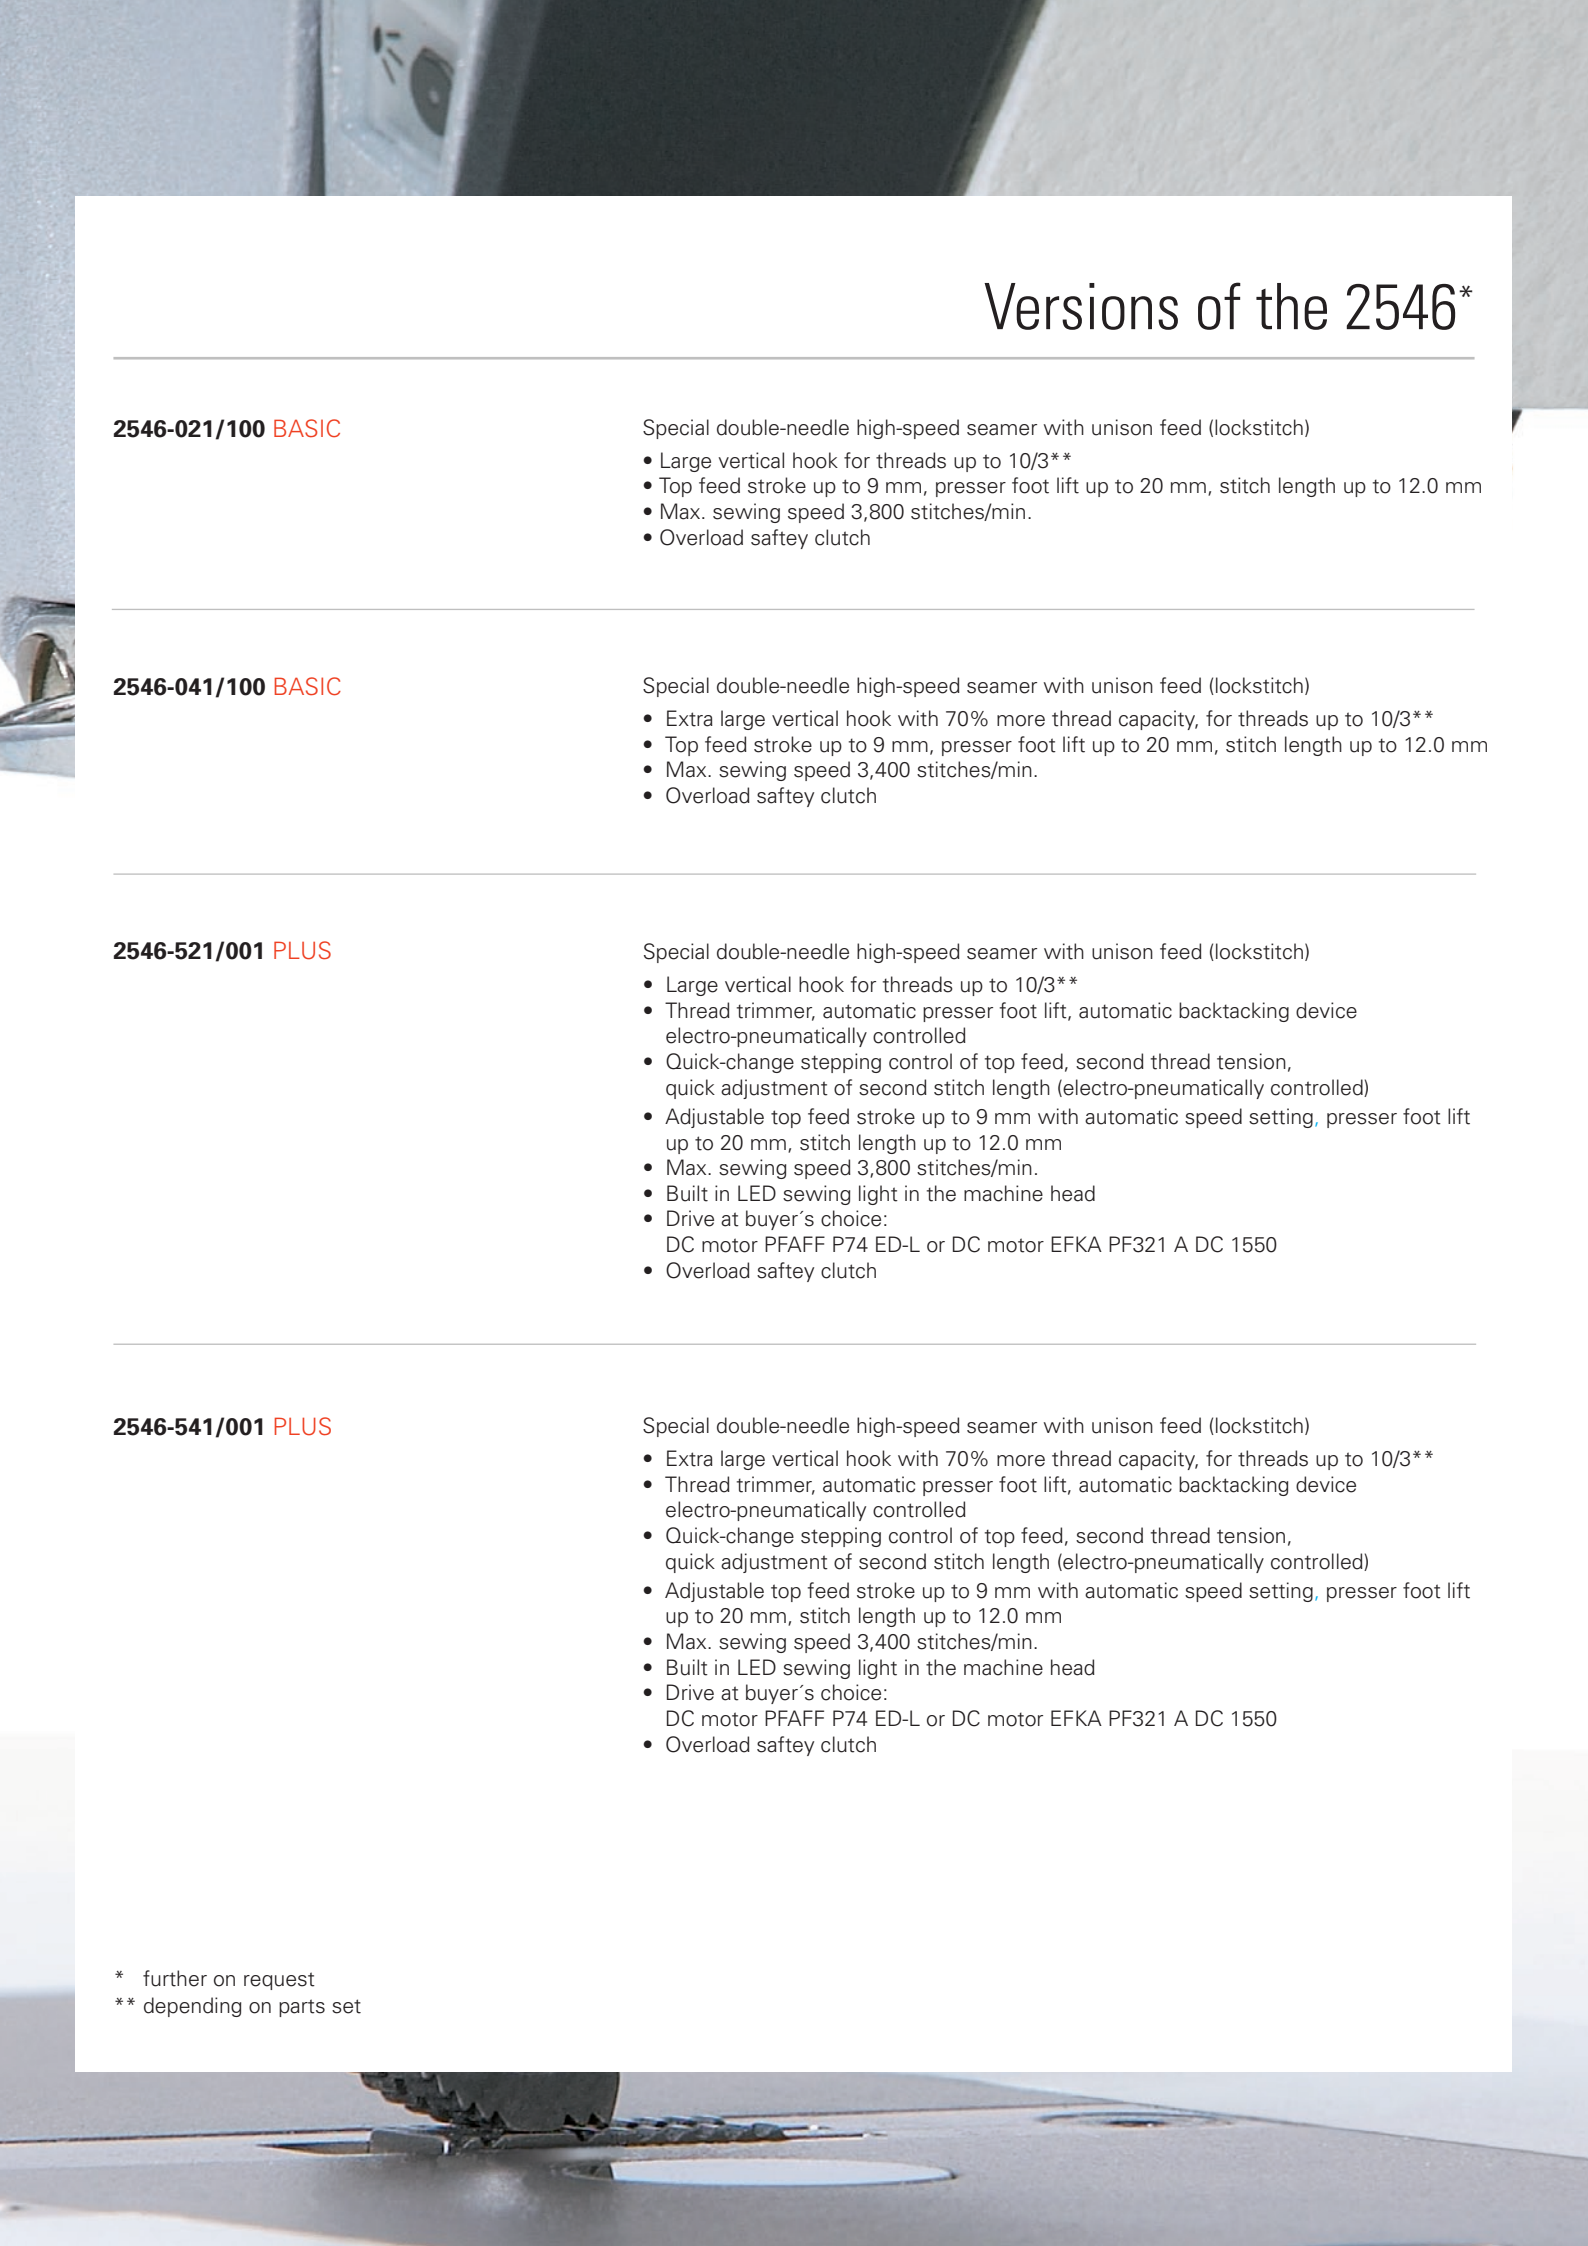

Versions of the 2546*

2546-021/100 BASIC

Special double-needle high-speed seamer with unison feed (lockstitch)

- Large vertical hook for threads up to 10/3**
 - Top feed stroke up to 9 mm, presser foot lift up to 20 mm, stitch length up to 12.0 mm
 - Max. sewing speed 3,800 stitches/min.
 - Overload safety clutch
-

2546-041/100 BASIC

Special double-needle high-speed seamer with unison feed (lockstitch)

- Extra large vertical hook with 70% more thread capacity, for threads up to 10/3**
 - Top feed stroke up to 9 mm, presser foot lift up to 20 mm, stitch length up to 12.0 mm
 - Max. sewing speed 3,400 stitches/min.
 - Overload safety clutch
-

2546-521/001 PLUS

Special double-needle high-speed seamer with unison feed (lockstitch)

- Large vertical hook for threads up to 10/3**
 - Thread trimmer, automatic presser foot lift, automatic backtacking device electro-pneumatically controlled
 - Quick-change stepping control of top feed, second thread tension, quick adjustment of second stitch length (electro-pneumatically controlled)
 - Adjustable top feed stroke up to 9 mm with automatic speed setting, presser foot lift up to 20 mm, stitch length up to 12.0 mm
 - Max. sewing speed 3,800 stitches/min.
 - Built in LED sewing light in the machine head
 - Drive at buyer's choice:
DC motor PFAFF P74 ED-L or DC motor EFKA PF321 A DC 1550
 - Overload safety clutch
-

2546-541/001 PLUS

Special double-needle high-speed seamer with unison feed (lockstitch)

- Extra large vertical hook with 70% more thread capacity, for threads up to 10/3**
- Thread trimmer, automatic presser foot lift, automatic backtacking device electro-pneumatically controlled
- Quick-change stepping control of top feed, second thread tension, quick adjustment of second stitch length (electro-pneumatically controlled)
- Adjustable top feed stroke up to 9 mm with automatic speed setting, presser foot lift up to 20 mm, stitch length up to 12.0 mm
- Max. sewing speed 3,400 stitches/min.
- Built in LED sewing light in the machine head
- Drive at buyer's choice:
DC motor PFAFF P74 ED-L or DC motor EFKA PF321 A DC 1550
- Overload safety clutch

* further on request

** depending on parts set

Applications



Top-stitching applications in the automotive industry

Application:

Top-stitching (double-needle) on voluminous car seat covers

Parts sets / attachments:

parts kit 63/24 C N9
(needle distance: 8 mm)



Decorative ornamental stitching in the automotive industry

Application:

Ornamental stitching on centre section of back rests

Parts sets / attachments:

parts kit 6/14 C N9



Lap-felling seams in the automotive industry

Application:

One-sided top-stitching of the assembly seam for seat section and attached head-rest on front car seat

Parts sets / attachments:

parts kit 6/14 C N9
+ edge guide (91-156-765-91)



Closing seams/assembly seams during pre-assembly work in the automotive industry

Application:


Attaching the side sections to the centre seat sections during pre-assembly of high-quality car seats

Parts sets / attachments:

parts kit 6/14 C N9
+ edge guide (91-156-763-91)

Innovative lubrication system

New lubrication system for accurate adjustment of the fresh oil supply to the hook. Prevents oil leakage (soiling of work-piece).

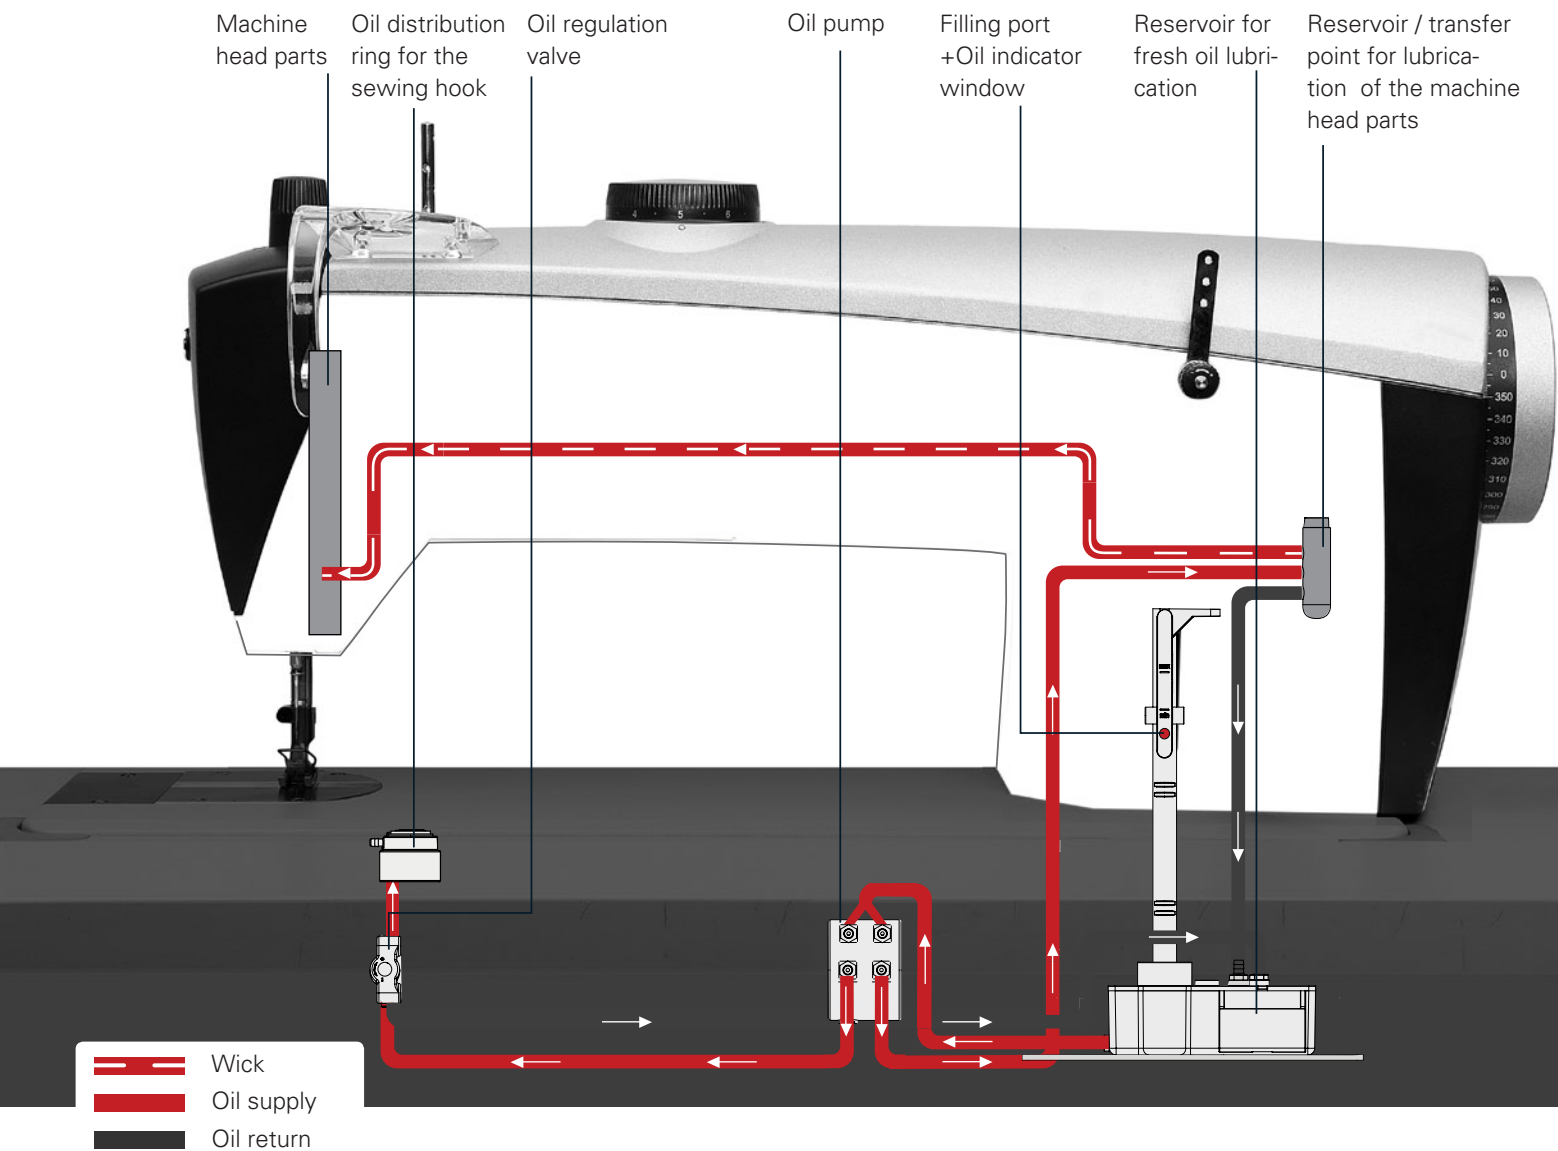

Features



①

Bobbin winder

Equipped with an aid for a secure and fast start of the bobbin winding process and within easy reach of the operator („winding assistant“)



②

Top feed stroke adjustment

Guarantees quick and accurate adjustment of the first and second top feed stroke. Adjustments are made in small increments.

- outer dial: up to 5 mm stroke
- inner dial: up to 9 mm stroke

③

Thread nipper


Ensures a neat seam start
(no thread tail on top of the
work piece)



④

LED light

Integrated in the sewing head

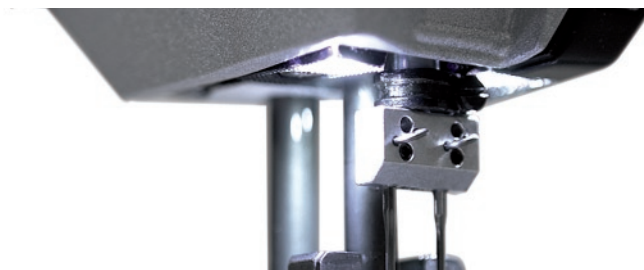


⑤-⑥

Increased top feed stroke

Up to 9 mm

Clearance under the sewing

foot Up to 20 mm

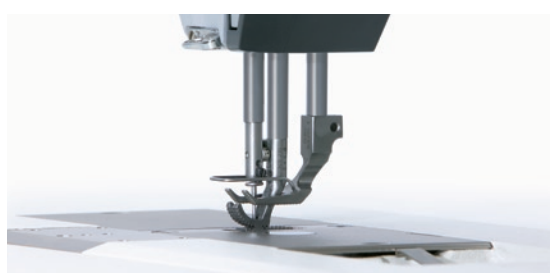

⑦

Hook saddle / Thread trimmer

Reliable and excellent cutting performance:

Threads up to 10/3 (metric) can be
cut without any problems



⑧

Large clearance

Under the machine arm
of 345 x 120 mm.



⑨

Scale disk

An adjustment aid for the mechanic:

- Needle bar rise
- Needle height
- Take-up lever



Features: control panels

From left to right:

Reverse sewing/intermediate backtacks

Needle position change (w/o trimming)

Recall preset top feed lift and adding second thread tension (programmable)

Backtack on/off

Recall preset stitch length

Second thread tension switched on / Switch for threading position (all pedal functions are blocked)

Safety switch:

Brings the machine in threading position and blocks all pedal functions. This prevents the operator from accidentally starting the machine and adds an additional safety feature.

From top to bottom:

Oil level warning

Bobbin thread control indicator

Programmable **multi-switch**


Functions, which are needed for the current sewing application, can be transferred to the soft switch (multi function switch) on the sewing head



Unique service concept

Easy and fast access to all adjustments:






The top arm cover and the head cover can be removed after loosening just 3 screws.

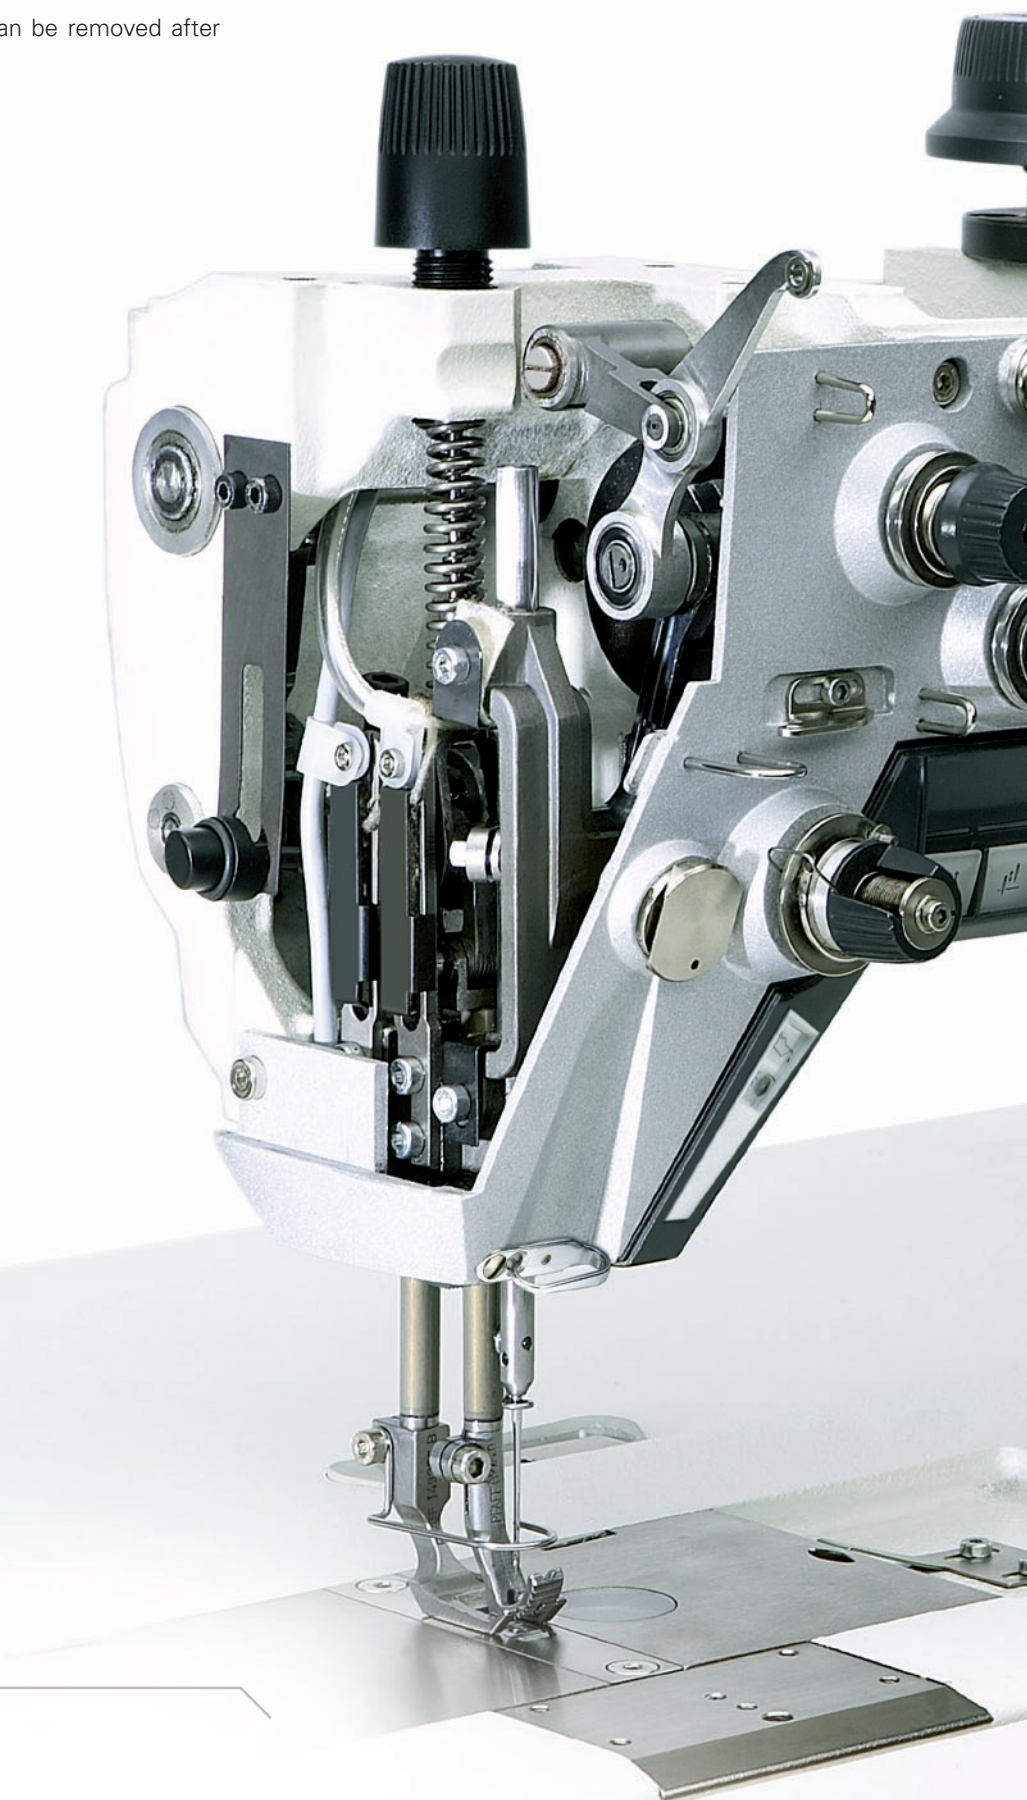
























POWERline 2545/46



Parts kits 2545

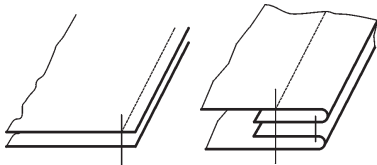


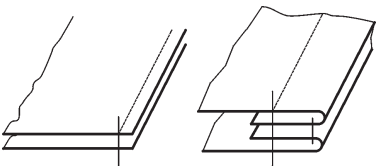

Parts kit	Seam construction	Operation
-6/14 N (N = 6 mm) C medium weight material D heavy weight material		Standard parts kit for all types of sewing work, e.g.: • Closing seams • Edge sewing work on fitted covers • Fancy seams
-6/14 N9 (N9 = 9 mm) C medium weight material D heavy weight material		
-6/14 N12 (N12 = 12 mm) C medium weight material D heavy weight material		
-2/04 N (N = 6 mm) C medium weight material Top-stitch width: 1.5 (standard), 2, 3, 4 mm		Work on right edge e.g. • Attaching fastening sections • Sewing zip on one side
-3/04 N (N = 6 mm) C medium weight material Top-stitch width: 1.5 (standard), 2, 3, 4 mm		Work on left edge e.g. • Attaching fastening sections • Sewing zip on one side
-6/01 N (N = 6 mm) C medium weight material		Standard, feeding optimized, parts set especially for applications where seam control is of utmost importance, e.g.: • Closing seams • Fancy seams
-6/01 N9 (N9 = 9 mm) C medium weight material		
-6/01 C N-900/82 (N = 6 mm) C medium weight material		Standard, feeding optimized, parts set especially for applications with thread trimmer for short thread ends (-900/82), e.g.: • Closing seams • Fancy seams (Top-stitching work)
-6/01 C N9-900/82 (N9 = 9 mm) C medium weight material		
-6/07 N (N = 6 mm) C medium weight material		Closing seams, topstitching work on edges with cross seams (Climbing parts set)
-6/07 N9 (N9 = 9 mm) C medium weight material		Closing seams, topstitching work on edges with cross seams (Climbing parts set)

























	Feed dog	Needle plate	Top feeder	Presser foot
	91-159 026-04/002 (CN) 91-159 026-04/003 (DN) 	91-150 919-25 (CN6/DN6) 91-150 920-25 (CN9/DN9) 91-150 921-25 (CN12/DN12) 	91-049 394-93/003 (CN) 91-049 394-93/011 (DN) 	91-149 262-91 (CN6/DN6) 91-149 264-91 (CN9/DN9) 91-149 266-91 (CN12/DN12) 
	91-159 027-04/... * 91-159 039-04/002 (4 mm) 	91-150 935-24/... * 	91-049 394-93/... * 	91-149 268-93/... * 
	91-159 030-04/... * 91-159 039-04/002 (4 mm) 	91-150 936-24/... * 91-150 935-24/004 (4 mm) 	91-049 408-93/... * 91-049 394-93/003 (4 mm) 	91-149 270-93/... * 
	91-159 039-04/002 	91-150 935-24/004 (CN) 91-150 922-25 (CN9) 	91-049 394-93/003 	91-149 262-91 (CN) 91-149 264-91 (CN9) 
	91-159 084-93 Knife 91-501 738-05 	91-501 812-25 (CN) 91-501 734-25 (CN9) 	91-149 318-93 	91-149 332-91 (CN) 91-149 334-91 (CN9) 
	91-159 026-04/002 	91-150 919-25 (CN) 91-150 920-25 (CN9) 	91-049 394-93/003 	91-049 772-93/032 

* Size required!




Parts kits 2545

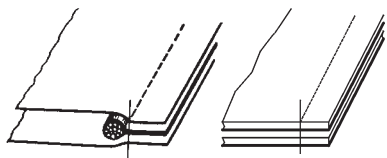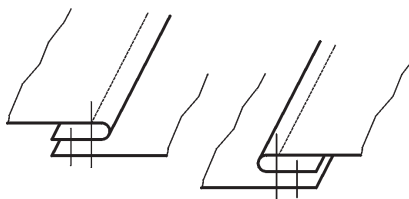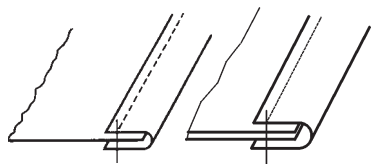Parts kit	Seam construction	Operation
-6/13 N9 (N9 = 9 mm) C medium weight material		Closing seams on quilted covers
-40/12 N9 (N9 = 9 mm) C medium weight material for piping sizes from 5 ; 6 ; <u>7</u> ; 8 ; 9 mm (standard: = <u>7</u> mm)		Piping work: side adjustment of feed dog for pre-piping and piping work
-40/14 N9 (N9 = 9 mm) C medium weight material for piping sizes from 3 ; 4 ; <u>5</u> ; 6 ; <u>7</u> ; 9 ; 11 mm (standard: = <u>5</u> + <u>7</u> mm)		Piping work: pre-piping and piping work
-113/05 N9 (N9 = 9 mm) C medium weight material Top-stitch width: 3 ; <u>3.5</u> ; 4 ; 4.5 mm (standard: = <u>3.5</u> mm) (in connection with edge guide: 91-156-765-91)		Top-stitching and closing Seam on one side
-17/01-650/03 N9 (N9 = 9 mm) (without binder) C medium weight material Binding width: 5 ; 10 ; 15 mm		Binding work (on customers request)








	Feed dog	Needle plate	Top feeder	Presser foot
	91-159 026-04/002 	91-150 920-25 	91-149 215-93/001 	91-149 275-91 
	91-159 038-04/001 	91-150 850-25 	91-049 402-93/... * 	91-049 782-93/... * 
	91-159 026-04/002 	91-150 920-25 	91-149 217-93/... * 	91-149 169-93/... * 
	91-159 039-04/002 	91-150 922-25 	91-149 280-93/... * 	91-149 278-93/... * 
	91-159 050-05 	91-150 979-25 	91-049 491-93/... * 	91-149 303-93/... * 
* Size required!		other parts -17/01 91-170 363-15 91-170 364-15  91-501 742-25 	Attachment holder -17/01 91-156 269-90 	Tape holder -17/01 91-043 943-70/895 

Parts kits 2546


Parts kit	Needle gauges (– = standard)	Seam construction	Operation
-6/01 N (N = 6 mm) C medium weight material	4 ; 4.8 ; 6 ; 6.4 ; 8 ; 10 ; 12 mm		Standard parts kit for all types of sewing work , e.g.: • Top-stitching work • Fancy seams
-6/01 N9 (N9 = 9 mm) C medium weight material	4 ; 4.8 ; 6 ; 6.4 ; 8 ; 10 ; 12 ; 16 ; 20 mm		
-6/01 N12 (N12 = 12 mm) D heavy weight material	6 ; 6.4 ; 8 ; 10 ; 12 ; 16 mm		
-6/03 N (N = 6 mm) C medium weight material	6 ; 8 ; 10 mm		Parts kit with compensating presser foot for top-stitching work (on both sides)
-6/03 N9 (N9 = 9 mm) C medium weight material	6 ; 8 ; 10 ; 12 mm		
-6/03 N12 (N12 = 12 mm) D heavy weight material	8 ; 10 ; 12 ; 16 mm		
-63/24 N9 (N9 = 9 mm) C medium weight material	6 ; 8 ; 10 ; 12 ; 16 mm		Parts kit with compensating presser foot und seam-center guide for top-stitching work. (with or without tape from below)
-63/24 N12 (N12 = 12 mm) D heavy weight material	8 ; 10 ; 12, 16 mm		

Edge guides 2545/2546

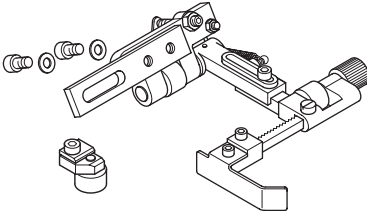
Edge guide	Parts No.	Suitable for parts kit	
		2545	2546
	91-156 763-91	-2/04 -6/07 -6/13 -6/14 -40/14	-6/01
	91-156 764-91	-3/04 -6/07 -6/13 -6/14	-6/01
	91-156 765-91	-6/07 ** -6/13 ** -6/14 ** -113/05	-6/01
	91-156 767-91	-2/04 -6/07 -6/13 -6/14	-6/01
	91-156 768-91	-2/04 -6/07 -6/13 -6/14 -40/14	-6/01

** feet have to be adapted

POWERline 2545/46

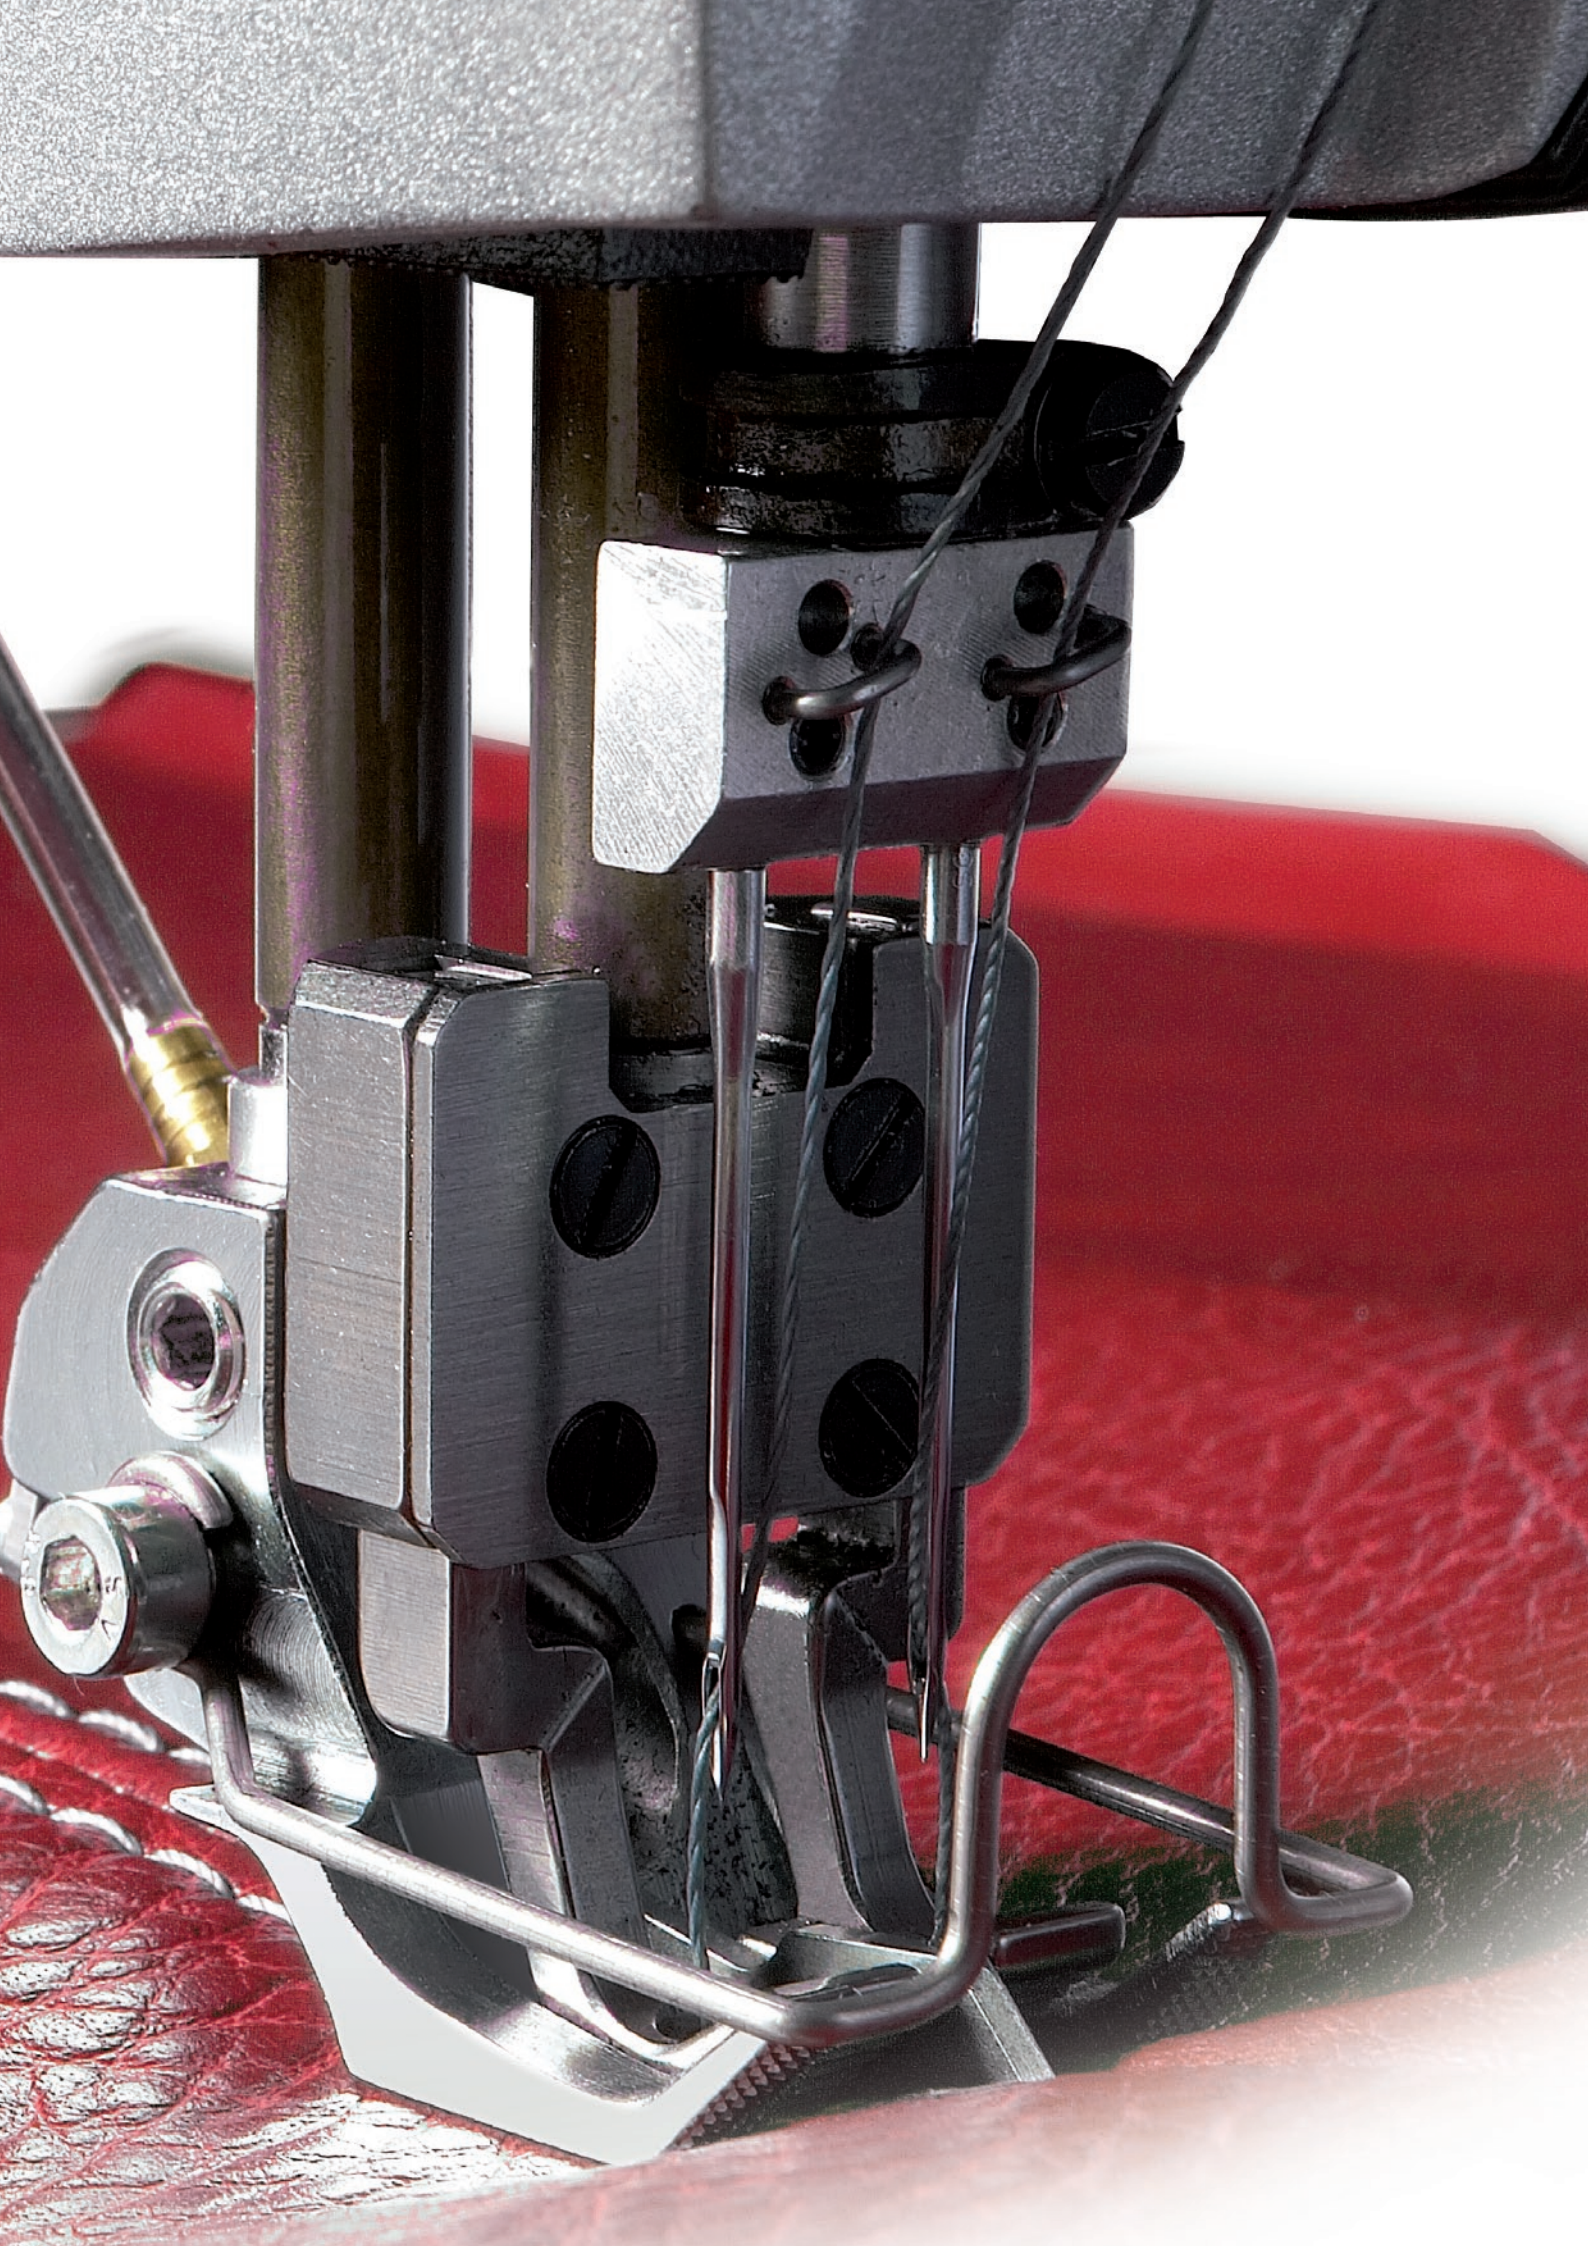

Technical data + Specifications 2545

Typ								
2545 BASIC 2545 - 021/100	●	3,800	12	A: 9 mm B: 20 mm		134-35	90 - 180	80/3 - 10/3
2545 BASIC 2545 - 041/100	●	3,400	12	A: 9 mm B: 20 mm		134-35	90 - 180	80/3 - 10/3
2545 CLASSIC 2545 - 321/041	●	3,800	12	A: 9 mm B: 20 mm	≤ 13	134-35	90 - 180	80/3 - 10/3
2545 CLASSIC 2545 - 341/041	●	3,400	12	A: 9 mm B: 20 mm	≤ 13	134-35	90 - 180	80/3 - 10/3
2545 CLASSIC 2545 - 321/042	●	3,800	9	A: 9 mm B: 20 mm	≤ 5	134-35	90 - 160	80/3 - 15/3
2545 CLASSIC 2545 - 341/042	●	3,400	9	A: 9 mm B: 20 mm	≤ 5	134-35	90 - 160	80/3 - 15/3
2545 PLUS 2545 - 521/001	●	3,800	12	A: 9 mm B: 20 mm	≤ 13	134-35	90 - 180	80/3 - 10/3
2545 PLUS 2545 - 521/002	●	3,800	9	A: 9 mm B: 20 mm	≤ 5	134-35	90 - 160	80/3 - 15/3
2545 PLUS 2545 - 541/001	●	3,400	12	A: 9 mm B: 20 mm	≤ 13	134-35	90 - 180	80/3 - 10/3

* = the max. sewing speed depends on pre-selected stroke and stitch length



Number of needles



Max. sewing speed




Max. stitch length




Top feed stroke (A) and fabric clearance (B)




Remaining thread length after cutting in mm





Needle system



Recommended needle size in Nm




Thread size (metrical number in Nm)

											
C:345 x D:120	●		●						●		
C:345 x D:120		●	●						●		
C:345 x D:120	●		●	●	○	●	●				●
C:345 x D:120		●	●	●	○	●	●				●
C:345 x D:120	●		●	●	●	●	●				●
C:345 x D:120		●	●	●	●	●	●				●
C:345 x D:120	●		●	●	○	●	●	●		●	
C:345 x D:120	●		●	●	●	●	●	●		●	
C:345 x D:120		●	●	●	○	●	●	●		●	

● standard

○ option



Arm clearance in mm



Vertical hook, large




Vertical hook, extra large



Bottom feed, needle and alternating unison feed



Thread trimmer



Thread nipper



Presser foot lift




Automatic backtacking



Control for two different stitch lengths



Top feed lift adjustable by knob



Top feed lift pre-selectable and recallable by knuckle switch, with automatic speed limitation



Top feed lift adjustable by knob with automatic speed limitation

Technical data + Specifications 2546

Types									
2546 BASIC 2546 - 021/100	●	3,800	12	A: 9 mm B: 20 mm		134-35	90 - 180	80/3 - 10/3	
2546 BASIC 2546 - 041/100	●	3,400	12	A: 9 mm B: 20 mm		134-35	90 - 180	80/3 - 10/3	
2546 PLUS 2546 - 521/001	●	3,800	12	A: 9 mm B: 20 mm	≤ 13	134-35	90 - 180	80/3 - 10/3	
2546 PLUS 2546 - 541/001	●	3,400	12	A: 9 mm B: 20 mm	≤ 13	134-35	90 - 180	80/3 - 10/3	


* = the max. sewing speed depends on pre-selected stroke and stitch length



Number of needles



Max. sewing speed




Max. stitch length




Top feed stroke (A) and fabric clearance (B)




Remaining thread length after cutting in mm




Needle system




Recommended needle size in Nm




Thread size (metrical number in Nm)

												
C:345 x D:120	4.0 - 50.0	●		●							●	
C:345 x D:120	4.0 - 50.0		●	●							●	
C:345 x D:120	4.0 - 50.0	●		●	●	○	●	●	●			●
C:345 x D:120	4.0 - 50.0		●	●	●	○	●	●	●			●

● standard
○ option



Arm clearance in mm



Needle gauge in mm



Vertical hook, large




Vertical hook, extra large



Bottom feed, needle- and alternating unison feed



Thread trimmer




Thread nipper



Presser foot lift



Automatic backtacking



Control for two different stitch lengths



Top feed lift adjustable by knob



Top feed lift pre-selectable and recallable by knuckle switch, with automatic speed limitation

PFAFF Industriesysteme und Maschinen AG

Hans-Geiger-Str. 12 – IG Nord
D – 67661 Kaiserslautern
www.pfaff-industrial.com

Telefon: +49-6301/3205-0
Telefax: +49-6301/3205-3171
E-mail: info@pfaff-industrial.com

